



Product Specification Sheet

(Issue 1.0)

Product Name:

10mm Closed Cell Foam Insulation and Sealing Material

Product Description:

Premium adhesive backed closed cell foam sealing and insulation material suitable for soundproofing thermal insulation and gap sealing.



Tolerance

Composition: NBR

N/A

Colour: Black

N/A

Weight: 120Kg /m³

± 15%

Thickness: 10mm

± 10%

Typical Temperature Stability: -20°C to +90°C

± 10%

Available Sizes: Up to 1m wide : up to 10m long

± 5%

Applicable Vehicle Areas:


Interior	Exterior	Underbody	Engine Bay

Applicable Applications:

Interior:	Tunnel	Dash	Floor	Roof
Interior:	Wheelarch	Loadspace	Pillars	Body
Exterior:	Wheelarch	Bumpers	Outer dash	Exhaust
Underbody:	Tunnel	Underfloor	Undertray	Transmission
Engine Bay:	Engine	Engine cover	Outer dash	Exhaust

Edge wrapping with high temperature woven tape recommended

The data in this product specification sheet is provided in good faith, however this information should only be used as a guide and not be used to determine a final product specification nor suitability for a specific application. It is the customers responsibility to ensure adequate performance testing is carried out prior to fitting any Campervan Insulation UK products into any application.

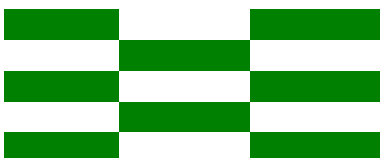

Lux Distribution Ltd
 (trading as Car Insulation UK)
 2 & 3 Rugby House, Hinckley Rd, Sapcote, LE9 4FS.
 Company No. VAT No.
 E: info@carinsulation.co.uk T: 01455 272921

