



# NOTES:

- 1 APPLY CUSTOM LABEL TO CASE AND IDENTIFY WITH LOT AND DATE CODES.
- 2 BOND THRUST RING TO CASE DURING NOZZLE INSTALL, APPLY CYANOACRYLATE TO EXTERIOR JOINT AFTER EPOXY CURE.

## REVISIONS

| EFFECTIVITY | REV | DESCRIPTION         | DATE        | APPROVED |
|-------------|-----|---------------------|-------------|----------|
| FUTURE      | A   | FIRST RELEASE ISSUE | 12 / 7 / 22 |          |

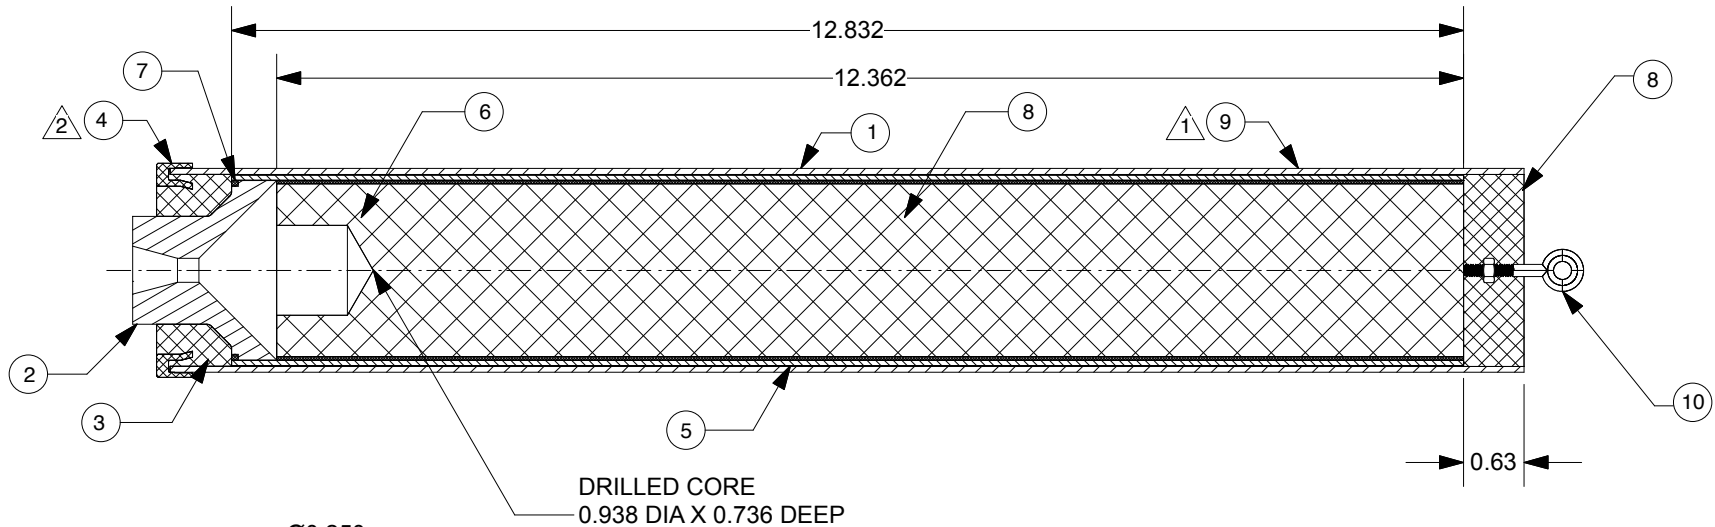

AFT END VIEW

| 1   | 95028       | WELDED STAINLESS EYEBOLT & NUT, 10-24 X 1-3/4"    | 10   |
|-----|-------------|---|------|
| 1   | NONE        | CUSTOM LABEL                                      | 9    |
| AR  | 03800-B     | EPOXY, FORWARD (BLACK) TBD GRAMS                  | 8    |
| 1   | 00031       | NOZZLE O-RING (1.875" O.D. X 1/16") 031           | 7    |
| 1   | 03N54-2     | PROP GRAIN (1.87" O.D. X 12.362" CAP TUBE) 8223AL | 6    |
| 1   | 03000-K71   | 54MM PHENOLIC LINER, 1.982" O.D. X 12.832" LONG   | 5    |
| 1   | 03122-2     | 54MM THRUST RING, BLACK                           | 4    |
| AR  | 03800-B     | EPOXY, AFT (BLACK) APPROX 50 GRAMS                | 3    |
| 1   | ISP12-500   | 54MM SU I & J NOZZLE DRILLED .250" DT             | 2    |
| 1   | 01990-2     | FIBERGLASS CASE, THIN (2.125" O.D. X 14.104")     | 1    |
| QTY | PART NUMBER | DESCRIPTION                                       | ITEM |

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES

.XX  
+/- .010

.XXX  
+/- .005

ANGLES  
+/- 2 deg.

MATERIAL

NOTED

FINISH

| CONTRACT NUMBER   |  | LIST OF MATERIAL |  |
|-------------------|--|------------------|--|
| PREP G. ROSENFELD |  | 12 / 22          |  |
| CHKR              |  |                  |  |
| APVD              |  |                  |  |
| APVD              |  |                  |  |
| SCALE 1 / 2       |  | SHEET 1 OF 1     |  |

2113 W 850 N  
Cedar City, Utah 84721  
(435) 865-7100 (Ph)  
(435) 865-7120 (Fax)

**K62N-P DMS™  
MOTOR ASSEMBLY**

**116200**