TV/Monitor Headrest Mount

Fitting Instructions

Thank you for your purchase; we want you to get the best results when using our products, so please be sure to read these instructions before attempting the installation of the TV headrest mount.

1

Tools required:
- Phillips screwdriver

The set comprises:
- Headrest Fixing Bracket
- TV Connecting Plate and Fixing Screws
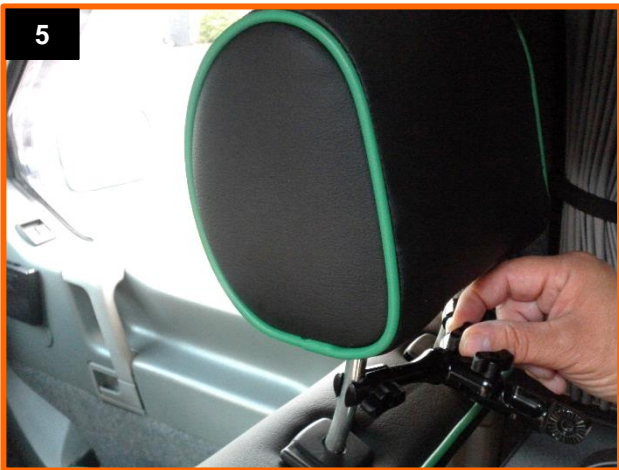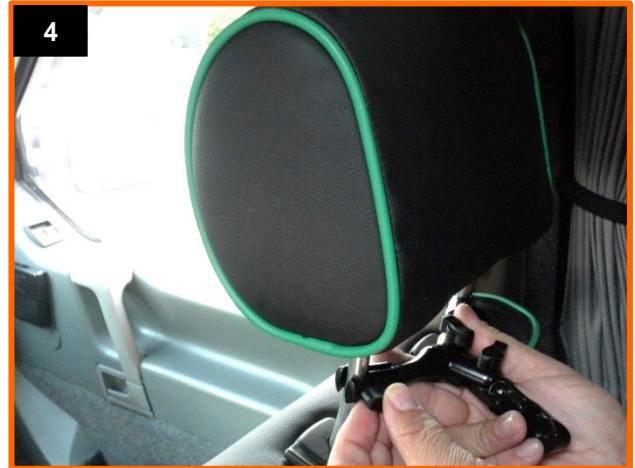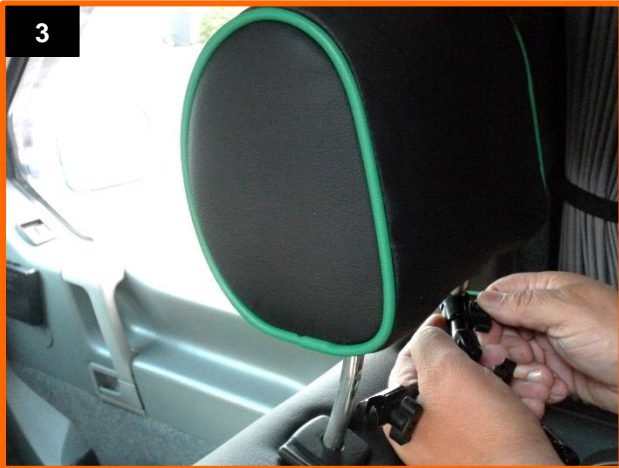
Fitting the TV Connecting Plate
1. The VESA Standard Connecting Plate has 75mm and 100mm holes that fit most flat screen TV's from 14" to 27". (fig.1) Fix the plate to the rear of the TV using the screws provided. (fig.2)

Note: Whilst every effort has been made to ensure these instructions are as accurate and clear as possible, we cannot be held responsible for misinterpretation or any subsequent accident or damage caused through mis-fitted parts.

Gallant UK
Tel: 01793 882353 Email: info@gallantuk.com
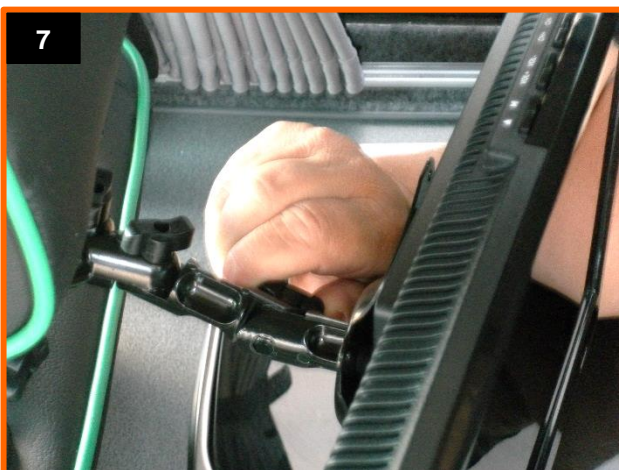www.gallantuk.com

Fitting the Headrest Bracket

2. Lift the headrest up to reveal the bars. Undo the thumb screw on one clamp end and fit it over the headrest bar. (fig.3) Repeat for the other side, then tighten them both up tight. (fig.4) Tighten up the centre thumb screw to lock it in place. (fig.5) Loosely tighten up the thumb screw on the connecting arm before fitting the TV. (fig.6)

Fitting the TV

3. Hold the TV in place and tighten the thumb screw. (fig.7) You can now adjust the angles by loosening the two thumb screws holding the arm and the TV, make the adjustment and tighten them up tight. (fig.8) The TV can be rotated so that it sits level.

IF YOU ARE UNSURE OR NEED ANY ADVICE, PLEASE CONTACT US

3

Note: Whilst every effort has been made to ensure these instructions are as accurate and clear as possible, we cannot be held responsible for misinterpretation or any subsequent accident or damage caused through mis-fitted parts.