

High Wall Heat Pump Ductless System

Indoor Model: **DLFPHAH12XAK**


Submittal Data

Job Data: Location:

Buyer: Buyer P.O. #: Carrier #:

Unit Number: Model Number:

Performance Data Certified By: Date:

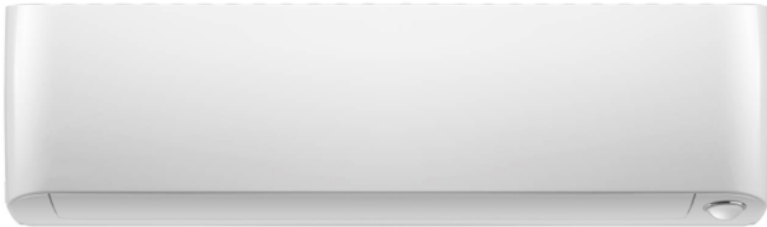

STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Fully Modulating fan speeds
- Sleep Mode
- Up-Down / Right-Left Louver control (fixed or swing)
- Relative Humidity Sensor
- Intelligent Eye
- ECO Mode
- Carbon Filter
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Aluminum Golden Hydrophilic pre-coated fins

Controls:

- Wireless Remote Controller included with indoor unit
- Wired Remote Controller KSACN0401AAA (7 Day programmable) (Optional)

System	Size	12	
	Indoor Model	DLFPHAH12XAK	
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	208/230-1-60	
	MCA	A.	0.3
Controls	Wireless Remote Controller (°F/°C Convertible)	Standard	
	Wired Remote Controller (°F/°C Convertible)	Optional	
Operating Range	Cooling Indoor DB Min -Max	° F (° C)	62~90 (17~32)
	Heating Indoor DB Min -Max	° F (° C)	57~68 (14~20)
Piping	Pipe Connection Size - Liquid	in (mm)	1/4 (6.35)
	Pipe Connection Size - Suction	in (mm)	1/2 (12.7)




Indoor Coil	Face Area (sq. ft.)	Sq. Ft.	2.2
	No. Rows		4
	Fins per inch		21
	Circuits		5
Indoor	Unit Width	in (mm)	35.2(895)
	Unit Height	in (mm)	11.7 (298)
	Unit Depth	in (mm)	9.8 (248)
	Net Weight	lbs (kg)	37.48 (17)
	Number of Fan Speeds		4
	Airflow (lowest to highest)	CFM	68/252/306/357
	Sound Pressure (lowest to highest)	dB(A)	19/35.5/41.5/46.1
	Air throw Data	ft (m)	22.97 (7)
	Moisture removal	Pint/h (L/h)	2.53 (1.2)
	Field Drain Pipe Size O.D.	in (mm)	1 (25.4)

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.
For Compatibility See Product Data

Accessories

KSACN0401AAA	Wired Remote Control 7 day Programmable
KSAIF0601AAA	Wi-Fi™ Kit High Wall High-Tier

Construction View

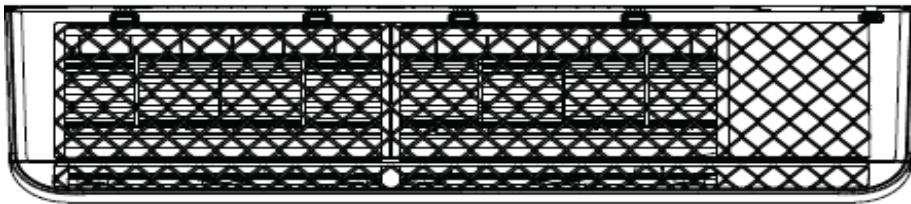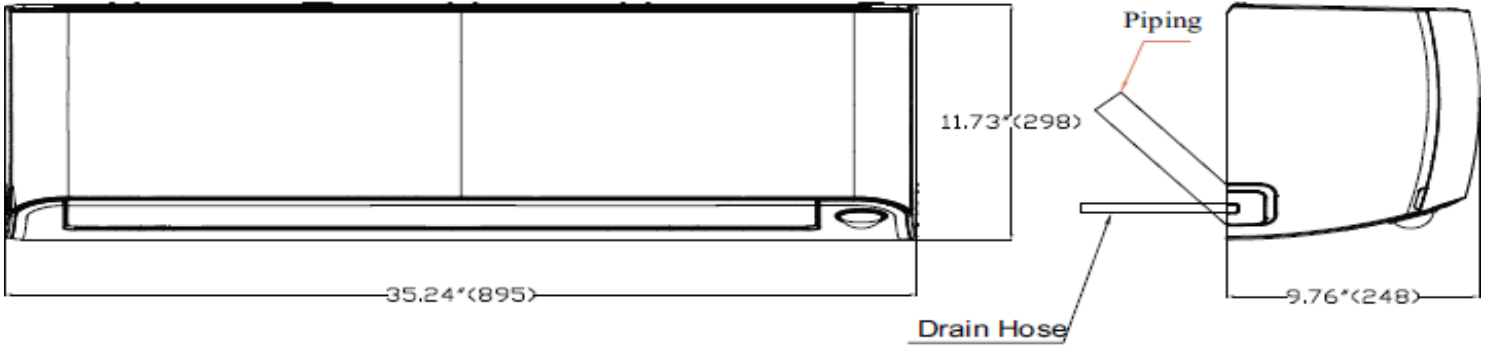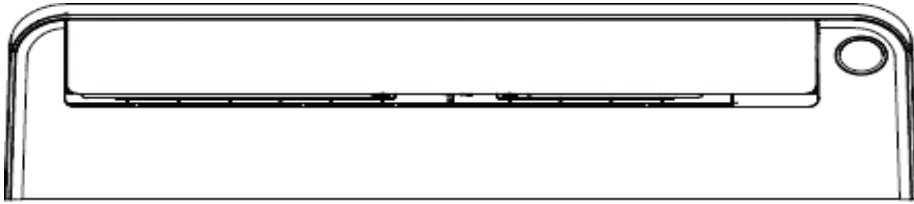

Drain Hose	Ø0.625*(16) L=25.20*(640)
------------	---------------------------

Unit: Inch (mm)

