

1/2 Ton Wall Mounted Unit CTXS07WVJU9

FEATURES

High Wall Mount Small capacity

BENEFITS

12 year limited parts warranty with registration



Submittal Date: 3/30/2023 10:05:37 AM

Page 1 of 4



1/2 Ton Wall Mounted Unit CTXS07WVJU9


ELECTRICAL		PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1	Gas Connection: (inch)	3/8
Running Current (A): (Rated amps)		Liquid Connection: (inch)	1/4
Power Consumption (W): (Rated watts)	FanMotorOutput?	Drain Connection: (inch)	5/8

SPECIFICATIONS				
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):		
High:	332	High:	350	
Med:	261	Med:	290	
Low:	194	Low:	233	
SuperLow:	145	SuperLow:	219	
COOLING - Sound Level (dBA):		HEATING - Sound Level (dBA):		
High:	38	High:	38	
Med:	32	Med:	33	
Low:	25	Low:	28	
SuperLow:	22	SuperLow:	25	
Dimensions (HxWxD) (in):	11-5/8 x 31-1/2 x 8-7/16	Net Weight (lb):	20	
Capacity Rated (Btu/hr):				



1/2 Ton Wall Mounted Unit CTXS07WVJU9

DIMENSIONAL DRAWING

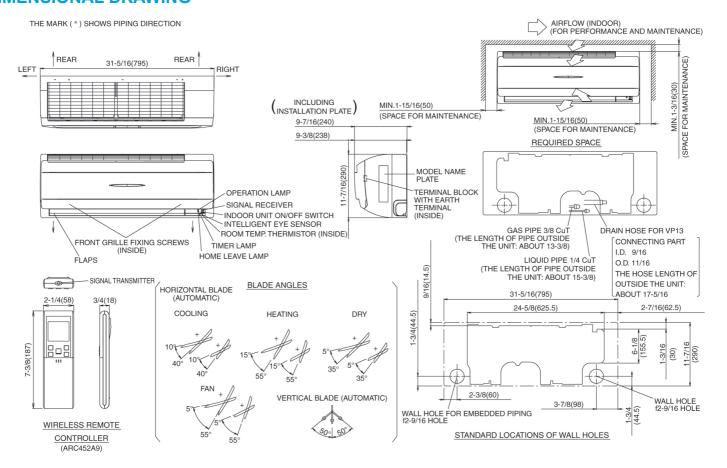



1/2 Ton Wall Mounted Unit CTXS07WVJU9

OPTIONAL ACCESSORIES

INCLUDED PART NUMBER	DESCRIPTION
No AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)
No AZAI6WSPDKC	DKN Plus Interface
No DTST-ONE-ADA-A	Daikin One+ Smart Thermostat for VRV, SkyAir, Single- and Multi-Zone System