

High Static Ducted Slim Heat Pump Ductless System

Indoor Model: D5FLDAH36XHK


Job Dat:

Location:

Tag #:

Carrier#:


Date:

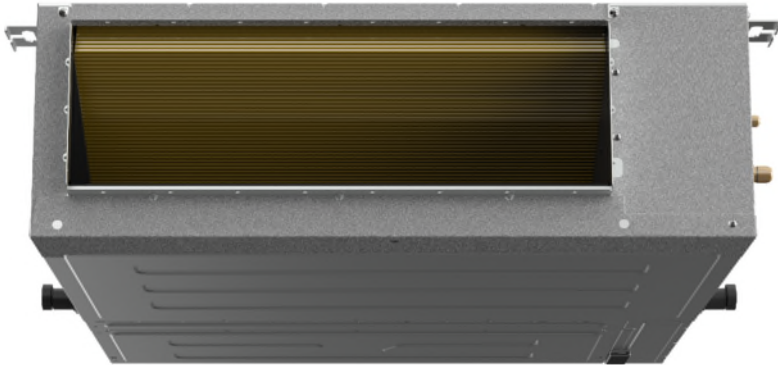


- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Vertical or Horizontal Installation
 - Rear or Bottom Return
 - Outside Air Intake
 - Condensate Lift pump shipped with the unit
 - Follow Me (senses temperature at handheld remote)
 - Refrigerant Leak Detection Sensor
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating
- LIMITED WARRANTY***
- Seven (7) years compressor and five (5) years parts warranty.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

Air outlet dimensions

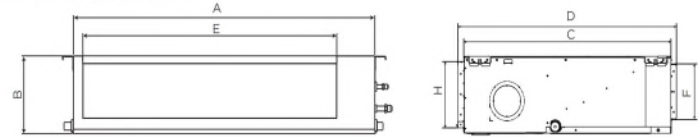

Air inlet dimensions

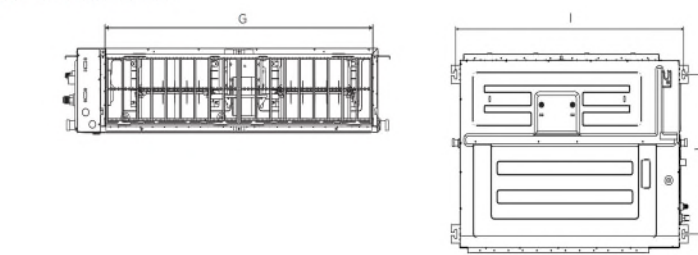

INDOOR UNIT DIMENSIONS					
Capacity	Unit	OUTLINE DIMENSION			
		A	B	C	D
36K/48K	inch/mm	47.2/1200	11.8/300	29.5/750	31.3/795
		AIR OUTLET OPENING SIZE		AIR RETURN OPENING SIZE	
		E	F	G	H
		40.4/1027	9.2/233	43.0/1092	10.5/267
		SIZE OF MOUNTED LUG			
		I	J		
		48.8/1240	25.2/640		

Indoor - Heat Pump			
System	Indoor Model #		D5FLDAH36XHK
	Indoor Size		36000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	4
Piping	Pipe Connection Size - Liquid	in (mm)	3/8(9.52)
	Pipe Connection Size - Suction	in (mm)	3/4(19)
Operating Range	Cooling Indoor DB Min - Max	°F(°C)	60~90(16~32)
	Heating Indoor DB Min - Max	°F(°C)	32~86(0~30)
Indoor Coil	No. Rows	4	
	Fins per inch	19	
	Circuits	9	
Indoor Unit	Number of Fan Speeds		790/730/670
	Airflow (highest to lowest)	CFM	1236.06 / 1059.48 / 941.76 / 765.18 / /
	Sound Pressure (highest to lowest)	dB(A)	N/A/45/40/34/31
Dimensions	Body Height	in (mm)	11.81(300)
	Body Width	in (mm)	47.24(1200)
	Body Depth	in (mm)	29.53(750)
	Body Net Weight	lbs (kg)	106.26(48.2)
	Shipping Height	in (mm)	14.13(359)
	Shipping Width	in (mm)	56.10(1425)
	Shipping Depth	in (mm)	33.86(860)
		Shipping Net Weight	120.37(54.6)
Accessories			
Standard	Wireless Remote Controller (°F/°C Convertible)		
	Wired Remote Control 7 Day Programmable		KSACN1401AAA
Optional	Wired Remote Control with Timer Function		KSACN1201AAA
	24V Mini Interface		KSAIC0601230
	24V GEN 3 Interface		KSAIC0501230



R-454B