

High Static Ducted Slim Heat Pump Ductless System

Indoor Model: D5FLDAH58XHK


Job Dat:

Location:

Tag #:

Carrier#:

Date:

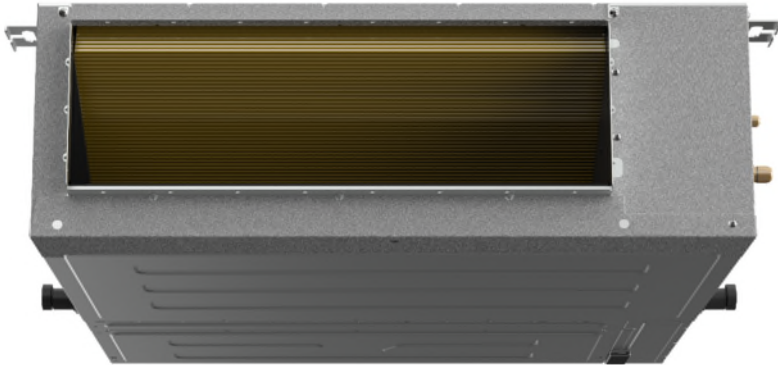


- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Vertical or Horizontal Installation
 - Rear or Bottom Return
 - Outside Air Intake
 - Condensate Lift pump shipped with the unit
 - Follow Me (senses temperature at handheld remote)
 - Refrigerant Leak Detection Sensor
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating

RESIDENTIAL APPLICATION LIMITED WARRANTY*


• Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

Air outlet dimensions

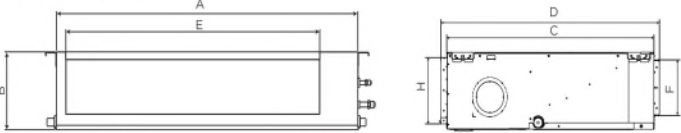

Air inlet dimensions

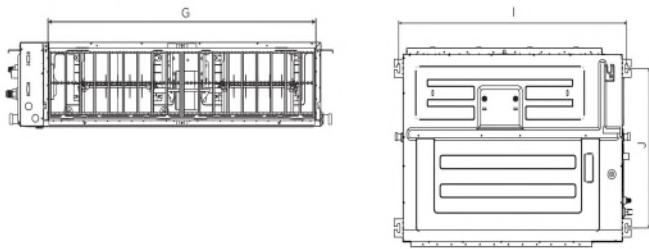

INDOOR UNIT DIMENSIONS					
Capacity	Unit	OUTLINE DIMENSION			
		A	B	C	D
55K/60K	inch/mm	55.1/1400	14.9/380	31.5/800	33.3/845
		AIR OUTLET OPENING SIZE		AIR RETURN OPENING SIZE	
		E	F	G	H
		48.1/1223	12.6/320	50.1/1272	13.0/330
		SIZE OF MOUNTED LUG			
		I	J		
		56.7/1440	26.3/668		

Indoor - Heat Pump			
System	Indoor Model #		D5FLDAH58XHK
	Indoor Size		60000
Electrical	Voltage, Phase, Cycle		V/Ph/Hz 208-230/1/60
	Power Supply		Indoor unit powered by outdoor unit
	MCA		A. 5
Piping	Pipe Connection Size - Liquid		in (mm) 3/8(9.52)
	Pipe Connection Size - Suction		in (mm) 3/4(19)
Operating Range	Cooling Indoor DB Min - Max		*F(°C) 60~90(16~32)
	Heating Indoor DB Min - Max		*F(°C) 32~86(0~30)
Indoor Coil	No. Rows		4
	Fins per inch		20
	Circuits		11
Indoor Unit	Number of Fan Speeds		850/780/700
	Airflow (highest to lowest)		CFM 2001.24 / 1706.94 / 1412.64 / 1118.34 //
	Sound Pressure (highest to lowest)		dB(A) N/A/52/48/42/41
Dimensions	Body Height		in (mm) 14.96(380)
	Body Width		in (mm) 55.12(1400)
	Body Depth		in (mm) 31.50(800)
	Body Net Weight		lbs (kg) 161.38(73.2)
	Shipping Height		in (mm) 17.52(445)
	Shipping Width		in (mm) 62.99(1600)
	Shipping Depth		in (mm) 36.02(915)
		Shipping Net Weight	lbs (kg) 178.13(80.8)
Accessories			
Standard	Wireless Remote Controller (*F/°C Convertible)		
	Wired Remote Control 7 Day Programmable		KSACN1401AAA
Optional	Wired Remote Control with Timer Function		KSACN1201AAA
	24V Mini Interface		KSAC0601230
	24V GEN 3 Interface		KSAC0501230



R-454B



R-454B