

Multizone Heat Pump Ductless System

Indoor Model: D5FVHAH12XCK


Job Data:

Location:

Tag #:

Carrier#:


Date:

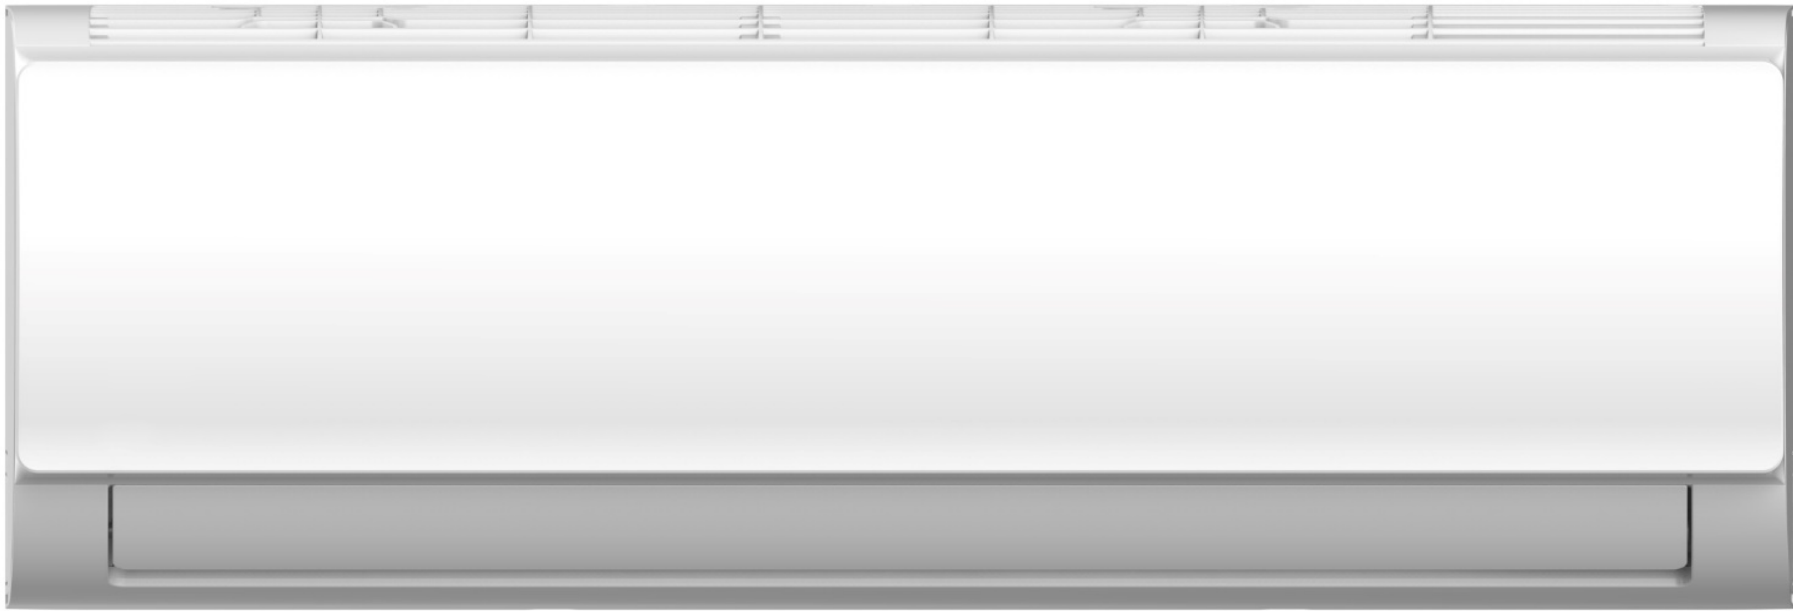

- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Four fan speeds
 - Sleep Mode
 - Turbo Mode
 - Follow Me (senses temperature at handheld remote)
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating
 - Pipe Connection Size - Liquid: 1/4in (6.35mm)
 - Pipe Connection Size - Suction: 3/8in (9.52mm)


- RESIDENTIAL APPLICATION LIMITED WARRANTY***
- Five (5) years parts and compressor warranty.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

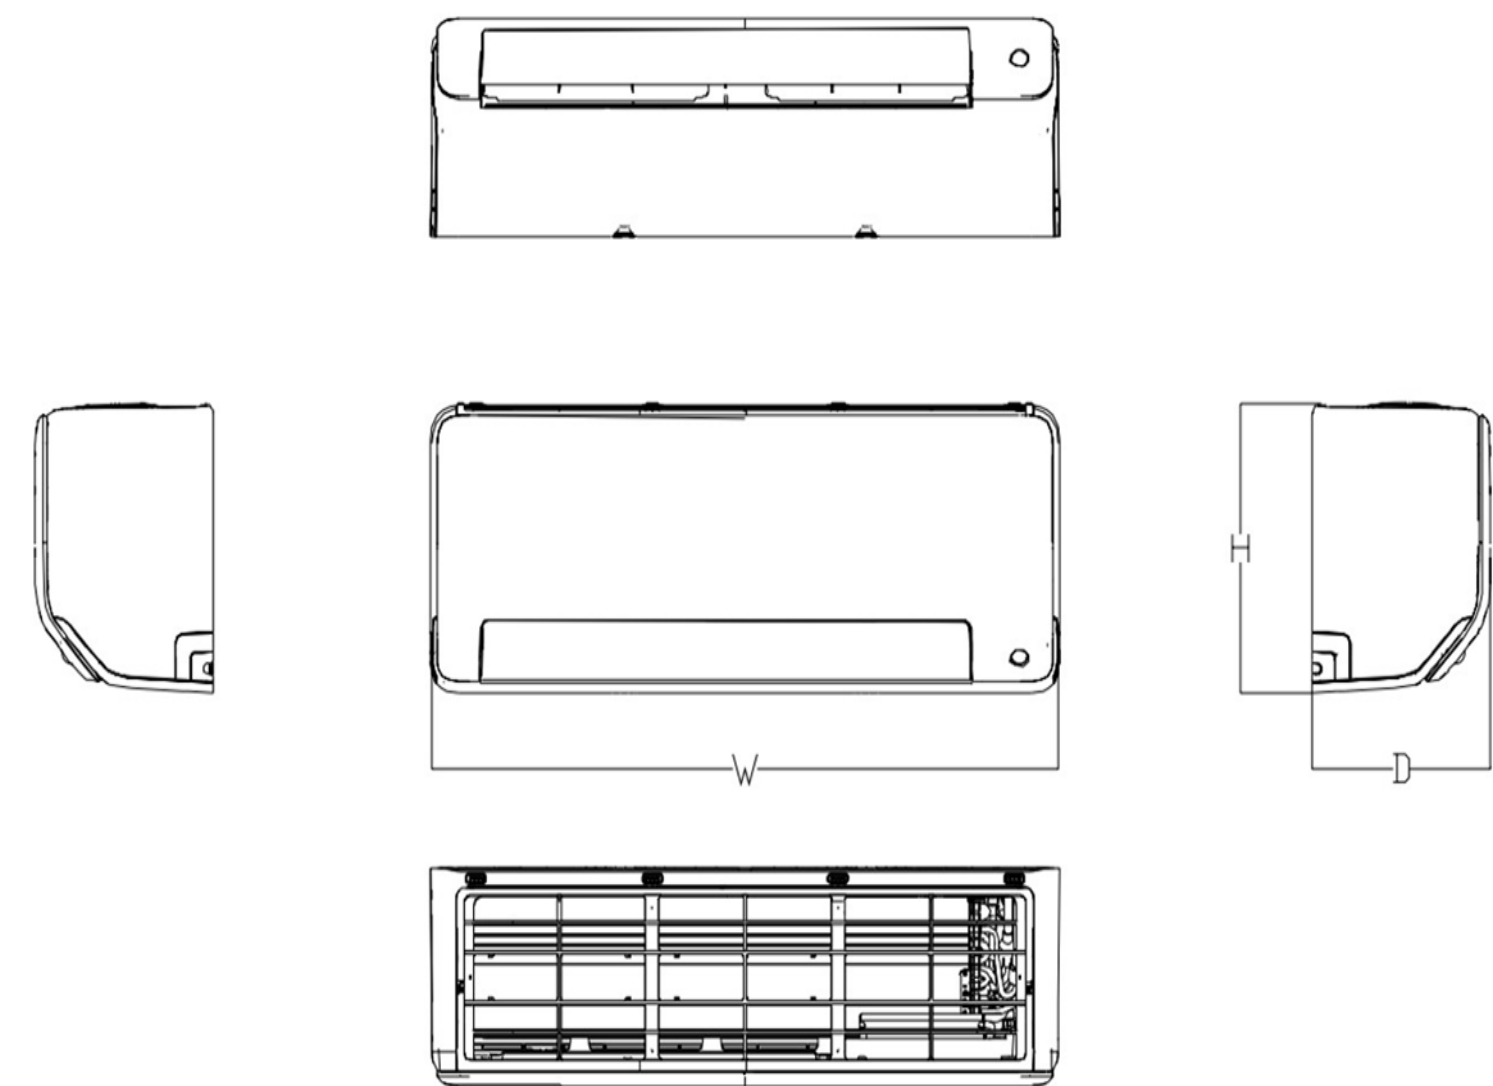

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
9K	mm	715	194	285
	inch	28.15	7.64	11.22
12K	mm	805	194	285
	inch	31.69	7.64	11.22
18K	mm	957	213	302
	inch	37.68	8.39	11.89
24K	mm	1040	220	327
	inch	40.94	8.66	12.87

D5FVHAH12XCK			
System	Indoor Model #		D5FVHAH12XCK
	Indoor Size		12000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
Operating Range	Cooling Indoor DB Min - Max	°F(°C)	60~90(16~32)
	Heating Indoor DB Min - Max	°F(°C)	32~86(0~30)
Indoor Coil	Face Area	Sq. Ft.	1.75
	No. Rows		2
	Fins per inch		22
	Circuits		4
Indoor Unit	Number of Fan Speeds		1180/968/862
	Airflow (highest to lowest)	CFM	294.3/241.3/176.6
	Sound Pressure (highest to lowest)	dB(A)	41.5/34.5/26.5/19
	Moisture Removal	L/h	1.7
	Air Throw Data	ft(m)	20.08(6.12)
Dimensions	Height	in (mm)	11.22(285)
	Width	in (mm)	31.69(805)
	Depth	in (mm)	7.64(194)
	Net Weight	lbs (kg)	17.42(7.9)
	Shipping Height	in (mm)	14.37(365)
	Shipping Width	in (mm)	34.25(870)
	Shipping Depth	in (mm)	10.63(270)
	Shipping Net Weight	lbs (kg)	23.15(10.5)
CONTROLS			
Standard	Wireless Remote Controller (°F/°C Convertible)		
Optional	Wired Remote Control with Timer Function		KSACN1201AAA
	Wi-Fi™ Kit High Wall		KSAIF0701AAA
	24V Mini Interface		KSAIC0601230

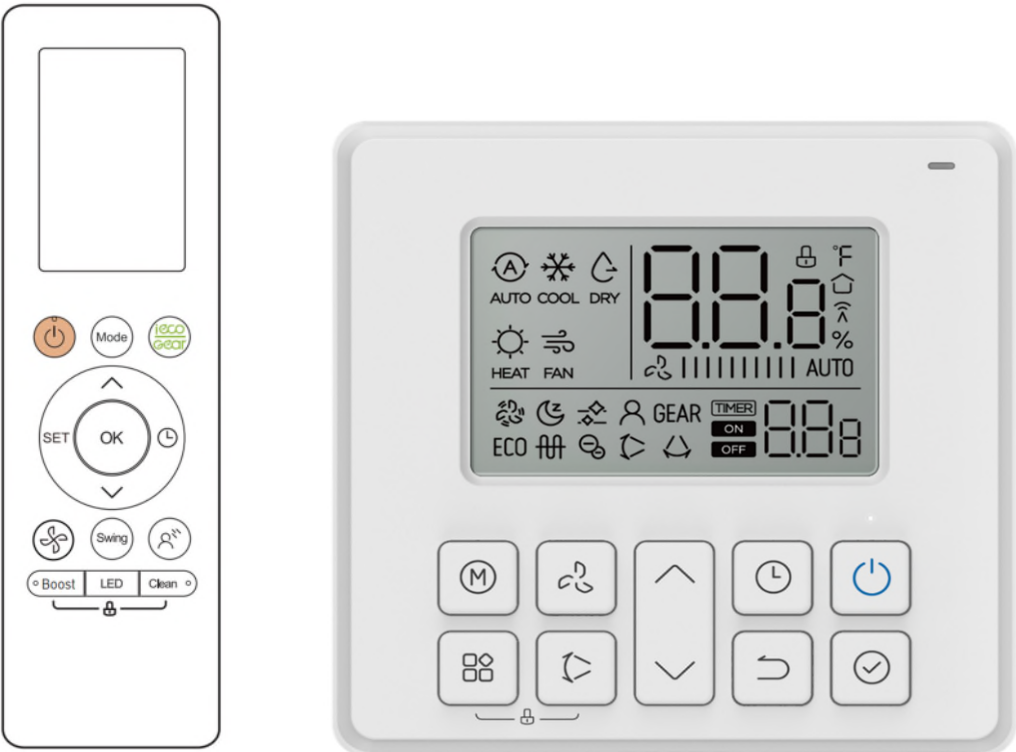

R-454B