

High Wall Heat Pump Ductless System

Indoor Model: **DLFEHBH09XAK**

Submittal Data

Job Data: Location:

Buyer: Buyer P.O. #: Carrier #:

Unit Number: Model Number:

Performance Data Certified By: Date:



STANDARD FEATURES:

- Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Four fan speeds
- Sleep Mode
- ECO Mode
- Up-Down Louver control (fixed or swing)
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Quiet indoor operation
- Aluminum Golden Hydrophilic pre-coated fins

CONTROLS:

- Wireless Remote Controller included with indoor unit

System	Size	09	
	Indoor Model	DLFEHBH09XAK	
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	0.19
Controls	Wireless Remote Controller (°F/°C Convertible)	Standard	
	Wired Remote Controller (°F/°C Convertible)	Optional	
Operating Range	Cooling Indoor DB Min -Max	°F(°C)	63~90 (17~32)
	Heating Indoor DB Min -Max	°F(°C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	1/4 (6.35)
	Pipe Connection Size - Suction	in (mm)	3/8 (9.52)

Indoor Coil	Face Area	Sq. Ft.	1.66
	No. Rows		2
	Fins per inch		20
	Circuits		2
Indoor	Unit Width	in (mm)	28.7 (729)
	Unit Height	in (mm)	11.5 (292)
	Unit Depth	in (mm)	7.87 (200)
	Net Weight	lbs (kg)	17.64 (8.0)
	Number of Fan Speeds		4
	Airflow (lowest to highest)	CFM	141/176/246/312
	Sound Pressure (lowest to highest)	dB(A)	27/31/36/43
	Air throw Data	ft (m)	22.6 (6.9)
	Moisture removal	Pint/h (L/h)	1.5 (0.69)
Field Drain Pipe Size O.D.	in (mm)	5/8 (16)	



Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.
For Compatibility See Product Data

Accessories

KSACN0901AAA	Wired Remote Control 7 Day Programmable
KSACN0101AAA	Wired Remote Control with Timer Function
KSAIF0601AAA	Wi-Fi™ Kit High Wall Mid-Tier
KSAIC0401230	24V Interface Kit 230V

Construction View

Indoor Model: **DLFEHBH09XAK**

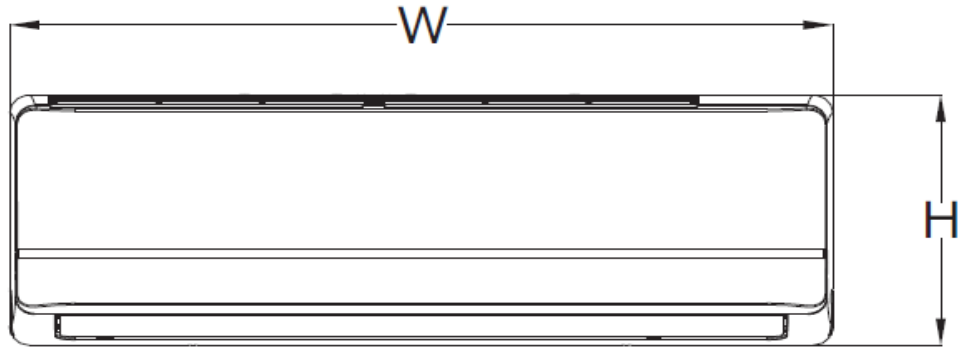

Unit Width	in (mm)	28.7 (729)
Unit Height	in (mm)	11.5 (292)
Unit Depth	in (mm)	7.87 (200)
Net Weight	lbs (kg)	17.64 (8.0)

