

High Wall Heat Pump Ductless System

Indoor Model: **DLFSHCH12XAK**

Submittal Data

Job Data:

Location:


Buyer: Buyer P.O. #:

Carrier #:

Unit Number: Model Number:

Performance Data Certified By:

Date:

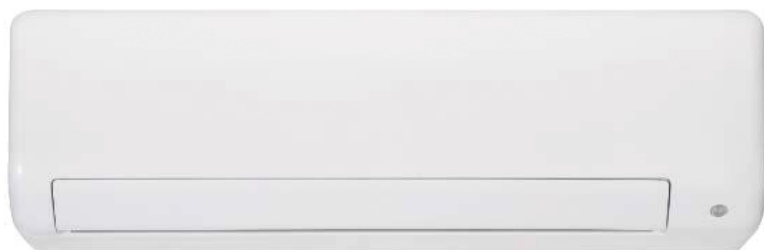

STANDARD FEATURES:

- Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Four fan speeds
- Sleep Mode
- ECO Mode
- Up-Down Louver control (fixed or swing)
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Quiet indoor operation
- Aluminum Golden Hydrophilic pre-coated fins

CONTROLS:

- Wireless Remote Controller included with indoor unit

System	Size	12	
	Indoor Model	DLFSHCH12XAK	
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	0.3125
Controls	Wireless Remote Controller (°F/°C Convertible)	Standard	
	Wired Remote Controller (°F/°C Convertible)	Optional	
Operating Range	Cooling Indoor DB Min -Max	°F(°C)	63~90 (17~32)
	Heating Indoor DB Min -Max	°F(°C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	1/4 (6.35)
	Pipe Connection Size - Suction	in (mm)	1/2 (12.7)

Indoor Coil	Face Area	Sq. Ft.	2.15
	No. Rows		2
	Fins per inch		20
	Circuits		3
Indoor	Unit Width	in (mm)	31.3 (795)
	Unit Height	in (mm)	11.61 (295)
	Unit Depth	in (mm)	8.86 (225)
	Net Weight	lbs (kg)	22.93 (10.4)
	Number of Fan Speeds		4
	Airflow (lowest to highest)	CFM	176/229/335/382
	Sound Pressure (lowest to highest)	dB(A)	30/32/37/47
	Air throw Data	ft (m)	26.2 (8.0)
	Moisture removal	Pint/h (L/h)	2.3 (1.1)
	Field Drain Pipe Size O.D.	in (mm)	5/8 (16)

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.


For Compatibility See Product Data

Accessories

KSACN0801AAA	Wired Remote Control 7 Day Programmable
KSACN0101AAA	Wired Remote Control with Timer Function
KSAIF0601AAA	Wi-Fi™ Kit High Wall Mid-Tier
KSAIC0401230	24V Interface Kit 230V

Construction View

Indoor Model: DLFSHCH12XAK

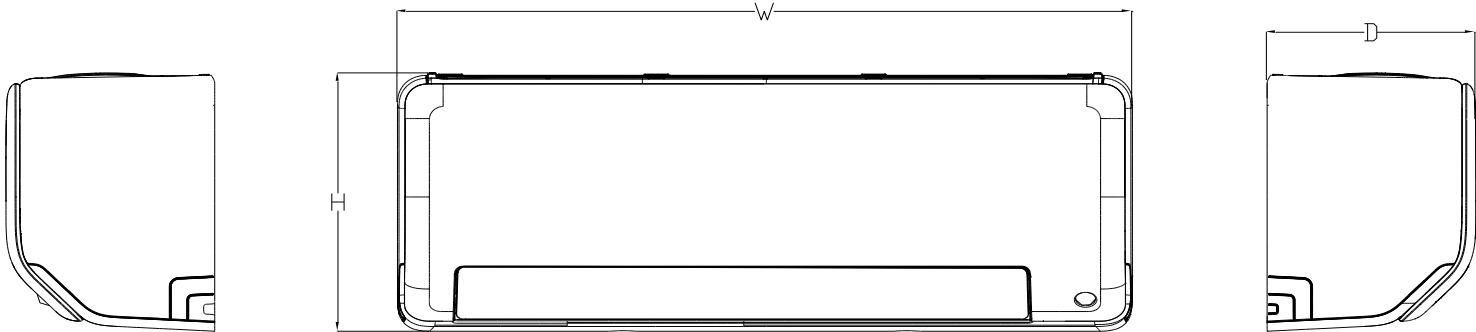

Unit Width	in (mm)	31.3 (795)
Unit Height	in (mm)	11.61 (295)
Unit Depth	in (mm)	8.86 (225)
Net Weight	lbs (kg)	22.93 (10.4)

