



Up to 20 SEER

Inverter Mini Split System

C o o l i n g E x p e r t

Low Ambient operation | Energy Saving | Strong Cooling

www.chigo.us




Fast Cooling



Longer Distance

CHIGO'S equipment allow longer distance air flow with the super blowing system

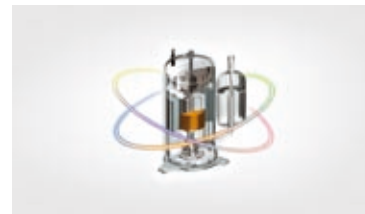

World Famous Compressor



Inverter Heatpump

Model			CS-25V1A-MB150DH5C	CS-35V1A-PB150DH5C	CS-53V2A-WB150DS	CS-66V2A-X150DT	
Rated volt and frequency		V-Ph-Hz	115V/1/60HZ	115V/1/60Hz	208-230V/1/60Hz	208-230V/1/60Hz	
Cooling		BTU	9000	12000	17500	21000	
Heating		BTU	11000	14000	20000	26000	
SEER/EER			20/12.5	20/12.5	19/12.5	19/12.5	
HSPF			10.3	10.0	9.8	10.5	
Rated current(Cooling/Heating)		A	7.0/8.5	9.3/10.8	13.5/15.5	16.2/20.1	
Compressor		Type (Rotary,Piston,scroll)	Rotary		Rotary	Rotary	
		Brand	Panasonic	Panasonic	HIGHLY	HIGHLY	
Indoor Unit		Indoor Sound Level	dB(A)	44/40/35	45/43/42	48/46/45	54/52/48
		Dimension (L*W*H)	in	31.5*11.0*7.5	35.4*11.5*8.5	42.5*11.9*8.7	51.2*13.1*9.6
		Packing (L*W*H)	in	34.1*14.1*10.8	39*14.8*12.5	45.9*15.4*12.4	55.5*16.9*13.6
		Weight (Net/Gross)	lbs	20/24	29/33	33/38	42/53
Outdoor Unit		Outdoor Sound Level dB	dB(A)	52.5	52.5	56.5	58.5
		Dimension (L*W*H)	in	32.0*10.1*21.3	32.0*10.1*21.3	34.2*12.2*27.6	35.4*13.0*32.9
		Packing (L*W*H)	in	36.2*13.2*23.4	36.2*13.2*23.4	39.0*16.1*30.7	40.5*17.3*36.8
		Weight (Net/Gross)	lbs	71/75	71/75	106/112	128/141
		Refrigerant type/weight	oz	R410A/44.5	R410A/46.6	R410A/58.2	R410A/74.1
Lineset		Liquid side/ Gas side	in	1/4"+3/8"	1/4"+3/8"	1/4"+1/2"	3/8"+5/8"
		Pre-Charge Length	ft	25	25	25	25
		Max. Line Run /Max. Elevation	ft	50/16.4	50/16.4	50/16.4	50/16.4



Sleep Mode



Easy to Clean Panel



360° Air Delivery



Timer Switch



Multiple Flow Speeds



Self-diagnosis